




- NILE
SERIES
- PUSUNG
SERIES
- DIY KIT
SERIES
- POLO
SERIES
- RV POWER
SUPPLY
SERIES
- SMALL HIGH
VOLTAGEHOME
SERIES
- INDUSTRUAL AND
COMMERCIAL
SERIES

DIY KIT SERIES

Rimdin-280

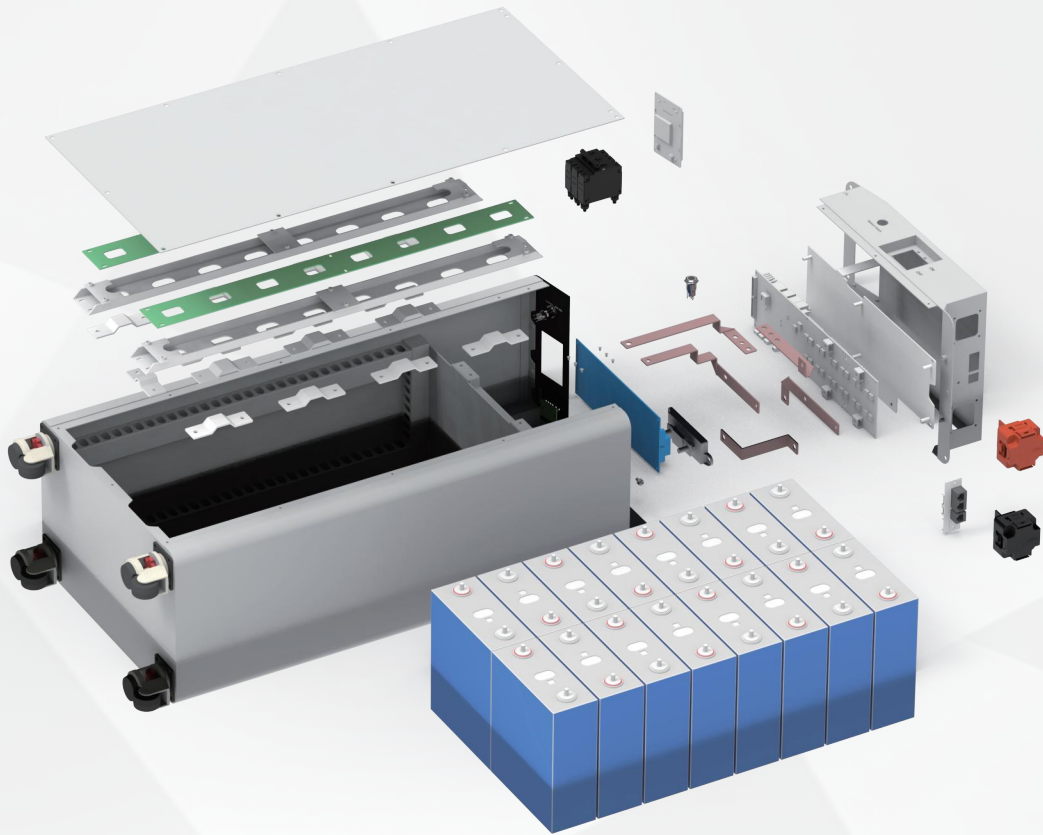

Technical Parameters

PRODUCT PERFORMANCE	RIMDIN-280
STANDARD VOLTAGE	51.2V
RATED CAPACITY	280AH
OPERATING VOLTAGE	42V-58.4V
STANDARD CHARGING CURRENT	100A/200A
MAXIMUM CHARGE/DISCHARGE CURRENT	200A
OPERATING TEMPERATURE RANGE	0-40°C(CHARGE)-20-40°C(DISCHARGE)
STORAGE TEMPERATURE	-10°C~35°C (1MONTH) 25±2°C (3MONTH) 65%±20%RH
CYCLE LIFE	8000 CYCLES @25°C 50A CHARGE AND DISCHARGE CURRENT 70% STANDARD CAPACITY 80% DOD
COMMUNICATION	CAN&RS485
WATERPROOF GRADE	IP20
HUMIDITY RANGE	5~95%
NET SIZE	898.5*415*260MM
NET WEIGHT	120±3KG